

5.0 A Ultra Fast Recovery Rectifier
Rectifier Reverse Voltage 50 to 1000V




Features

- Diffused junction
- Fast switching for high efficiency
- High current capability and low Forward Voltage Drop
- Surge overload rating to 150A peak
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

Mechanical Data

Case: Molded plastic
 Terminals: Solder plated solderable per MIL-STD-202, Method 208
 Polarity: Cathode band
 Mounting Position: Any
 Weight: 1.10 grams (approx)

DO-27

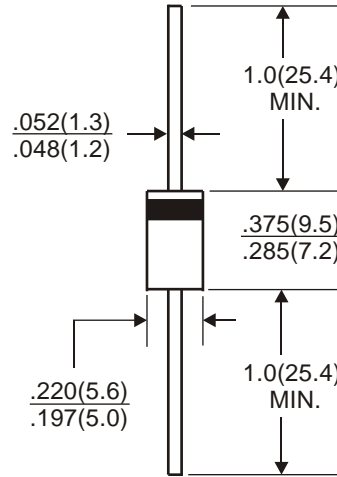

All dimensions inches and (millimeters)

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
 For Capacitive load derate current by 20%.

| Parameter | Symbol | UF 5400 | UF 5401 | UF 5402 | UF 5403 | UF 5404 | UF 5406 | UF 5407 | UF 5408 | unit |
|---|----------|--------------|---------|---------|---------|---------|---------|---------|---------|------|
| Maximum repetitive peak reverse voltage | VRRM | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS bridge input voltage | VRMS | 35 | 70 | 140 | 210 | 280 | 420 | 560 | 700 | v |
| Maximum DC blocking voltage | VDC | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | v |
| Maximum average forward rectified output current at TA=55°C | IF(AV) | 3.0 | | | | | | | | A |
| Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method) | IFSM | 150 | | | | | | | | A |
| Maximum reverse recovery time TJ=25°C | Trr | 50 | | | | 75 | | | | nS |
| Typical thermal resistance per element | ReJA | 20 | | | | | | | | °C/W |
| Typical junction capacitance per element | Cj | 75 | | | | 50 | | | | pF |
| Operating junction and storage temperature range | TJ, TSTG | -55 to + 150 | | | | | | | | °C |

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
 For Capacitive load derate by 20 %.

| Parameter | Symbol | UF 5400 | UF 5401 | UF 5402 | UF 5403 | UF 5404 | UF 5406 | UF 5407 | UF 5408 | Unit |
|---|--------|---------|---------|---------|---------|-----------|---------|---------|---------|------|
| Maximum instantaneous forward voltage drop per leg at 5.0A | VF | 1.3 | | | | 1.7 | | | | V |
| Maximum DC reverse current at rated DC blocking voltage per element | IR | | | | | 10 100 | | | | μA |

Rating and Characteristic Curves ($T_A=25^{\circ}\text{C}$ Unless otherwise noted) UF5400 thru UF5408

Fig. 1 Reverse Recovery Time and Test Circuit Diagram

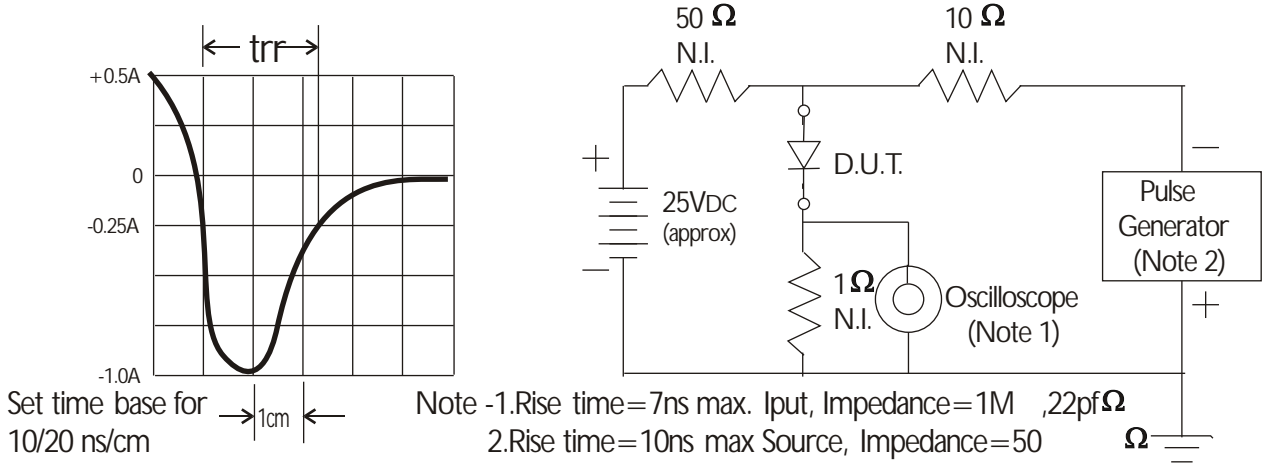


Fig. 2 Derating Curve for Output Rectified Current

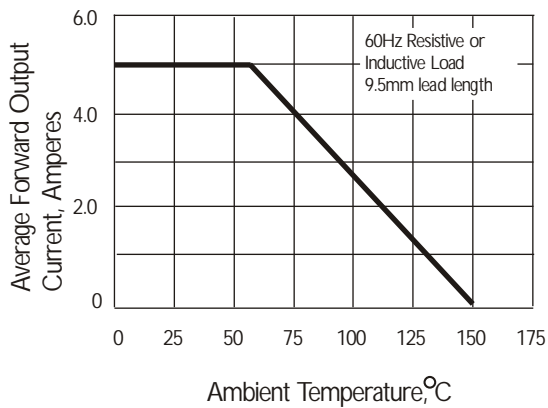


Fig. 3 Peak Forward Surge Current

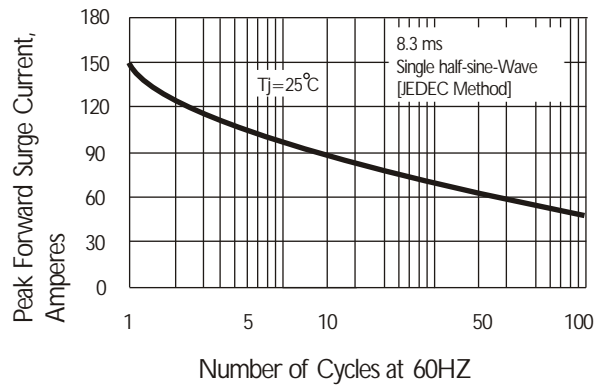


Fig. 4 Typical Instantaneous Forward Characteristics

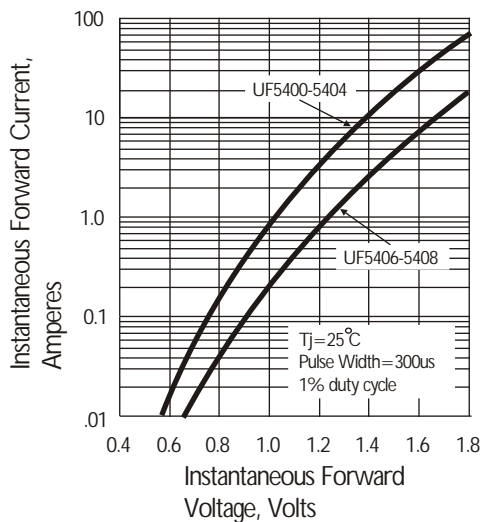


Fig. 5 Typical Junction Capacitance

