



SEP ELECTRONIC CORP.

SF51 thru SF57**5.0 A Super Fast Recovery Rectifier**
Rectifier Reverse Voltage 50 to 600V

DO-27

Features

- Diffused junction
- Fast switching for high efficiency
- High current capability and low Forward Voltage Drop
- Surge overload rating to 150A peak
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

Mechanical Data


Case: Molded plastic

Terminals: Solder plated solderable per MIL-STD-202,
Method 208

Polarity: Cathode band

Mounting Position: Any

Weight: 1.10 grams (approx)

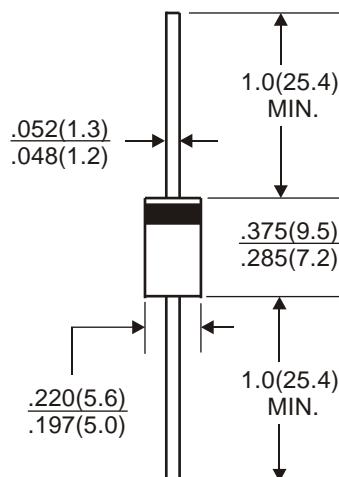

All dimensions inches and (millimeters)

Maximum Ratings & Thermal CharacteristicsRating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

| Parameter | Symbol | SF51 | SF52 | SF53 | SF54 | SF55 | SF56 | SF57 | unit |
|---|----------|------|------|------|------|--------------|------|------|------|
| Maximum repetitive peak reverse voltage | VRRM | 50 | 100 | 150 | 200 | 300 | 400 | 600 | V |
| Maximum RMS bridge input voltage | VRMS | 35 | 70 | 105 | 140 | 210 | 280 | 420 | V |
| Maximum DC blocking voltage | VDC | 50 | 100 | 150 | 200 | 300 | 400 | 600 | V |
| Maximum average forward rectified output current at TA=55°C | IF(AV) | | | | | 5.0 | | | A |
| Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method) | IFSM | | | | | 150 | | | A |
| Maximum reverse recovery time TJ=25°C | Trr | | | | | 35 | | | nS |
| Typical thermal resistance per element | ReJA | | | | | 30 | | | °C/W |
| Typical junction capacitance per element | Cj | | | | | 50 | | | pF |
| Operating junction and storage temperature range | TJ, TSTG | | | | | -55 to + 150 | | | °C |

Electrical CharacteristicsRating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

| Parameter | Symbol | SF51 | SF52 | SF53 | SF54 | SF55 | SF56 | SF57 | Unit |
|---|--------|------|------|------|------|------|------|------|------|
| Maximum instantaneous forward voltage drop per leg at 5.0A | VF | | | 0.95 | | 1.25 | | 1.50 | V |
| Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C | IR | | | 10 | | 100 | | | μA |

Rating and Characteristic Curves ($T_A = 25^\circ\text{C}$ Unless otherwise noted)
SF51 thru SF57

Fig. 1 Reverse Recovery Time and Test Circuit Diagram

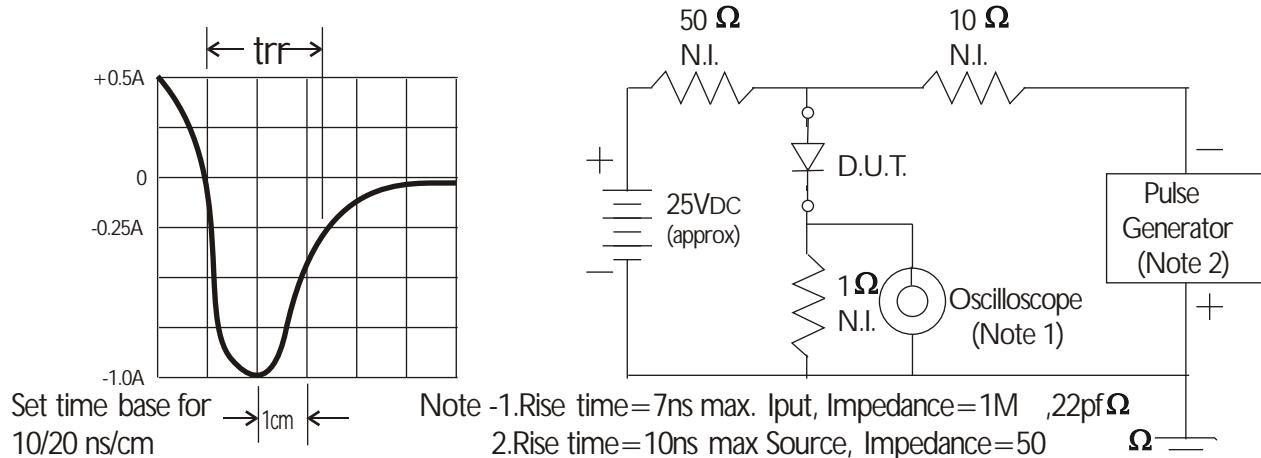


Fig. 2 Derating Curve for Output Rectified Current

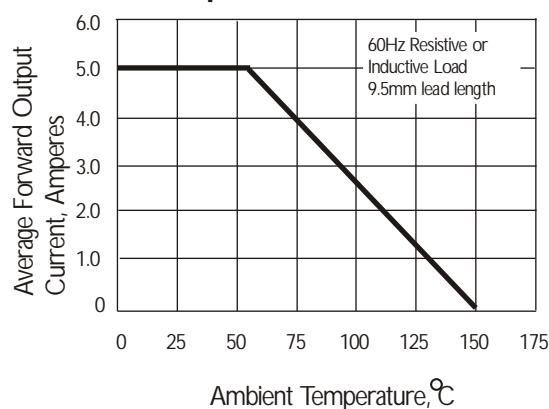


Fig. 4 Typical Instantaneous Forward Characteristics

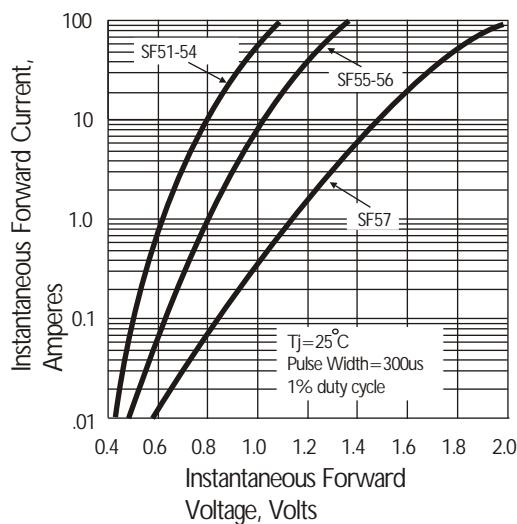


Fig. 3 Peak Forward Surge Current

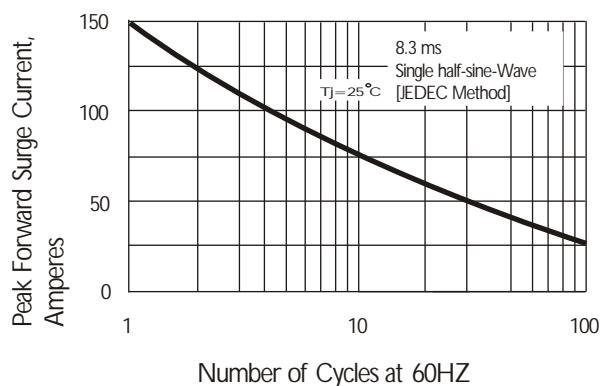


Fig. 5 Typical Junction Capacitance

